


SEN-MQ8

Analog hydrogen gas sensor on module

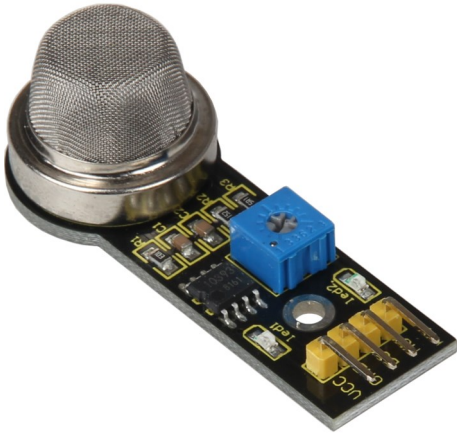

This analog gas sensor has a small heating part with an electrical chemical sensor. It is suitable for indoor usage. The sensor can output exact values only after warm-up phase.

Caution: sensor gets hot while usage!



MAIN FEATURES

Measurement range	100 - 1000 ppm
Measurable substances	Hydrogen (H ₂), diverse hydrogenous gases
Application areas	Detecting household gas leaks, gas alarm, robotic, microcontroller projects
Compatible with	Raspberry Pi (with AD-converter), Arduino, etc.
Special features	High sensitivity, which can be adjusted by potentiometer, for a wide range of concentrations
Dimensions	52 x 20 x 18 mm
Items delivered	SEN-MQ8

FURTHER SPECIFICATIONS

Analog Output	Values will be processed by microcontroller
Digital Output	Thresholds can be set
Pins:	
VCC	Voltage supply 5 V
GND	Ground
AOUT	Analog output
DOUT	Digital output
Heating voltage	5.0 V ± 0.1 V
Heating resistance	29 Ω ± 3 Ω (room temperat.)
Heating power	≤ 900 mW
Sensitivity	$R_s(\text{in air})/R_s(1000\text{ppmH}_2) \geq 5$
Operation temperature	-10 - 50 °C

FURTHER DETAILS

Article No.	SEN-MQ8
EAN:	4250236819990
Customs Tariff No.	90269000